

Vinyl #1 Corner Bead

Great for high-traffic and high-abuse corners

ClarkDietrich corner beads are used to provide strong corner reinforcement for conventional plaster applications.

They provide hard-to-damage, rust-proof, straight corners, which are easily curved for smooth arches. The solid PVC nose provides a straight, rigid, ground for screeding.

Vinyl is impervious to corrosion when coated in wet joint compounds, veneer plaster, or when placed in contact with steel or aluminum frames and resists impacts, dents, and damage during construction. No priming is required to add paint to vinyl products due to its paint adhesion properties. Vinyl has low electrical and thermal conductivity and is considered an excellent insulator, as well as being self-extinguishing and offering better resistance to burning than many other common building materials. Additionally, vinyl has a lower cost than equivalent products manufactured from zinc or aluminum, for use when the highest levels of corrosion resistance are required.

Product Data & Ordering Information:

Product code	Length (ft)	Ground	Size (in.)	Pcs./Box
#1	7, 8, 9, 10	Any	2-1/2 x 2-1/2	50
#2	8, 10	Any	2-3/4 x 2-3/4	40


ASTM & Code Standards:

- Material: ASTM D1784 and D4216 cell Class 13244C
- Installation: ASTM C1063 (Stucco), C1780-17 Standard Practice for Installation Methods for Adhered Veneer Stone
- SDS & Product Certification Information is available at www.clarkdietrich.com/SupportDocs

Storage:

All stored materials shall be kept dry. Materials shall be stacked off the ground, supported on a level platform, and protected from the weather.

09.22.00 (Supports for Plaster)

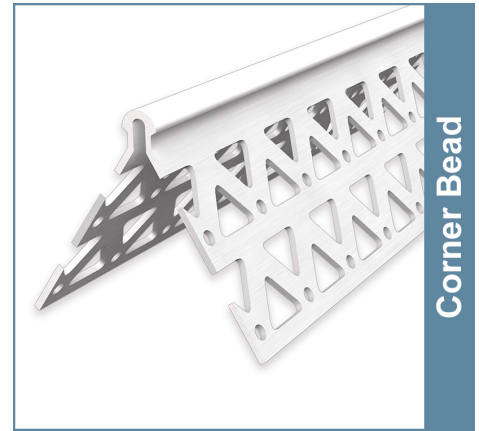

Project Information

Name:
Address:

Contractor Information

Name:
Contact:
Phone:
Fax:

Architect Information

Name:
Contact:
Phone:
Fax: