


# GEORGIAN™ & GEORGIAN™ HIGH WASHABILITY

Square Lay-in & Tegular  
medium texture

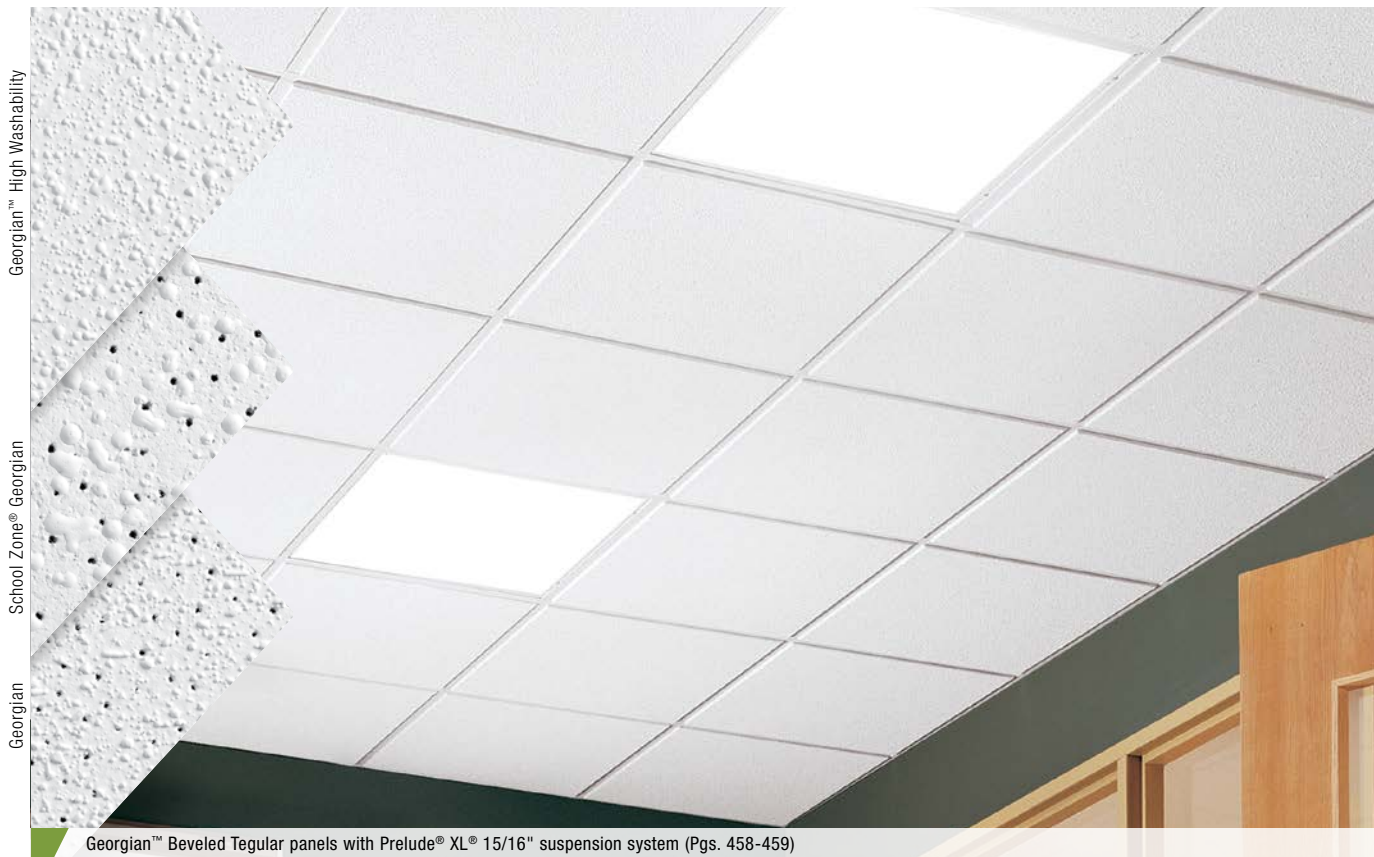

Georgian™ Beveled Tegular panels with Prelude® XL® 15/16" suspension system (Pgs. 458-459)

This medium-textured panel offers good acoustics and high washability options to meet USDA/FSIS guidelines.

## KEY SELECTION ATTRIBUTES

- Unique spatter-painted visual
- Total Acoustics® options (Items 795, 796)
- High Washability items available
  - Meets USDA/FSIS guidelines for use in food processing establishments
- Durable – Washable, Scrubbable, Impact-resistant, Scratch-resistant
- 30-Year Limited System Warranty against visible sag (excludes item 791 and other sizes), mold, and mildew

## TYPICAL APPLICATIONS

- Schools/classrooms (Items 795, 796)
- Corridors/conference rooms
- Kitchen/food preparation areas (Items 793, 794)

## COLOR



White  
(WH)

## DETAILS (Other Suspension Systems compatible. Refer to listing on page 323.)



1. Georgian™ Beveled Tegular
2. Georgian™ Beveled Tegular with Prelude® 15/16" suspension system
3. Georgian™ Beveled Tegular with Silhouette® 9/16" suspension system 1/4" Reveal

# GEORGIAN™ & GEORGIAN™ HIGH WASHABILITY

Square Lay-in & Tegular medium texture

**GREENGUARD Gold Certified**  
(details below)

UP TO **56%** RECYCLED CONTENT

Calculate LEED contribution at [armstrongceilings.com/greengenie](http://armstrongceilings.com/greengenie)

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

## VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 474-478 armstrongceilings.com/catdws	Item No.	Dimensions (Inches)
<b>GEORGIAN™</b>			
15/16" Square Lay-in		764	24 x 24 x 5/8"
		763	24 x 48 x 5/8"
		791	30 x 60 x 3/4"
15/16" Beveled Tegular	15	1752	24 x 24 x 5/8"
9/16" Beveled Tegular	29, 44, 48, 52, 56	1753	24 x 24 x 5/8"
<b>GEORGIAN – High Washability Panels, Unperforated</b>			
15/16" Square Lay-in		794	24 x 24 x 5/8"
		793	24 x 48 x 5/8"
<b>SCHOOL ZONE® GEORGIAN</b>			
15/16" Square Lay-in		796	24 x 24 x 3/4"
		795	24 x 48 x 3/4"
<b>SCHOOL ZONE® GEORGIAN Size Capabilities</b>			
15/16" Square Lay-in	Made-to-Order Sizes (3-4 Wks)	<b>3/4" Thick</b>	
		12" - 30"	18" - 72"

## PERFORMANCE SELECTION


Dots represent high level of performance.

\$\$\$

UL Classified Acoustics	Total Acoustics <sup>1</sup>	Fire Performance	Light Reflect	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Wash	Scrub	Impact	Scratch	Recycled Content	Recycle Program	30-Yr Warranty
NRC + CAC =	NRC + CAC	Fire	Light	Bio-Block	Humi-Guard+	Certified Low VOC Emissions	Wash	Scrub	Impact	Scratch	Recycled Content	Recycle Program	30-Yr Warranty
0.55 33	-	Class A	0.86	•	•	•	-	-	•	•	•	•	•
0.55 33	-	Class A	0.86	•	•	•	-	-	•	•	•	•	•
0.55 33	-	Class A	0.86	•	Std	•	-	-	•	•	•	•	1-Yr
0.55 35	-	Class A	0.86	•	•	•	-	-	•	•	•	•	•
0.55 35	-	Class A	0.86	•	•	•	-	-	•	•	•	•	•
N/A 33	-	Class A	0.88	•	•	•	•	•	•	•	•	•	•
N/A 33	-	Class A	0.88	•	•	•	•	•	•	•	•	•	•
0.65 35	<b>GOOD</b>	Class A	0.86	•	•	•	-	-	•	•	•	•	•
0.65 35	<b>GOOD</b>	Class A	0.86	•	•	•	-	-	•	•	•	•	•
N/A N/A	-	Class A	0.86	•	Std	•	-	-	•	•	•	•	1-Yr

<sup>1</sup> Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product. **GOOD** (NRC 0.60-0.65; CAC 35+) **BETTER** (NRC 0.70-0.75; CAC 35+) **BEST** (NRC 0.80+; CAC 35+)

## SUSPENSION SYSTEMS



## PHYSICAL DATA

**Material**  
Wet-formed mineral fiber

**Surface Finish**  
Factory-applied latex paint

**Fire Performance**  
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled). Fire Guard™: A fire-resistive ceiling when used in applicable UL assemblies (Class A).

**ASTM E1264 Classification**  
Type III, Form 2, Pattern C E  
Items 794, 793, 898 –  
Type IX, Form 2, Pattern G  
Fire Class A

**Sag Resistance**  
HumiGuard® Plus ceiling panels are recommended for areas subject to high humidity, up to, but not

including, standing water and outdoor applications. Excludes Item 791 and made-to-order panels.

**Mold/Mildew Protection**  
Ceiling panels with BioBlock® performance resist the growth of mold and mildew.

**Acoustical Performance**  
CAC testing conducted using Silhouette® suspension system.

**VOC Emissions**  
**GREENGUARD Gold Certified**  
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

**High Recycled Content**  
Contains greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.



**Insulation Value**  
R Factor - 1.6 (BTU units)  
R Factor - 0.28 (Watts units)

**30-Year Performance Guarantee & Warranty**  
When installed with Armstrong® Suspension System. Details at [armstrongceilings.com](http://armstrongceilings.com)

**Weight; Square Feet/Carton**  
763, 793 – 0.67 lbs/SF; 96 SF/ctn  
764, 794, 1752, 1753 – 0.72 lbs/SF; 64 SF/ctn  
791 – 0.76 lbs/SF; 75 SF/ctn  
796 – 1 lbs/SF; 48 SF/ctn  
795 – 1 lbs/SF; 64 SF/ctn

**Minimum Order Quantity**  
1 carton, excludes made-to-order panels

**Metric Items Available**  
1753M, 764M, 763M, 791M, 1752M, 796M, 795M, 794M, 793M – Metric items are subject to extended lead times and minimum quantities. Contact your representative for more details.

TechLine / 1 877 276-7876  
[armstrongceilings.com/commercial](http://armstrongceilings.com/commercial)  
(search: georgian)  
BPCS-3031-918

LEED® is a registered trademark of the U.S. Green Building Council  
UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates  
© 2018 AWI Licensing LLC Printed in the United States of America

**Armstrong®**  
CEILING & WALL SOLUTIONS

323

MINERAL FIBER