

TINCRAFT™


Circles, Squares & Triangles

Tegular

smooth texture



Tincraft™ Squares panels with Suprafine® XL® 9/16" suspension system (Pgs. 466-467)

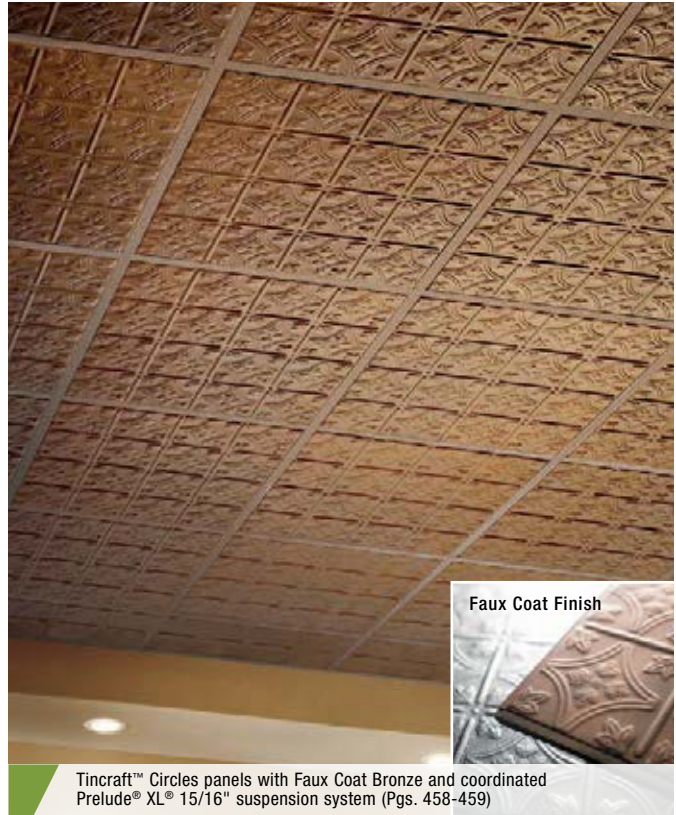

Tincraft™ Circles panels with Faux Coat Bronze and coordinated Prelude® XL® 15/16" suspension system (Pgs. 458-459)


These panels offer the look of old-world tin ceilings with low-relief panels in classic designs, an array of standard metallic colors, and sound blocking.

KEY SELECTION ATTRIBUTES

- Early 20th century embossed metal look
- Affordable, practical alternative to traditional tin and metal ceilings
- Finely detailed design for upscale look
- High sound-blocking CAC (35)

NOTE: Not recommended for areas requiring acoustical performance

COLORS Due to printing limitations, shade may vary from actual product.

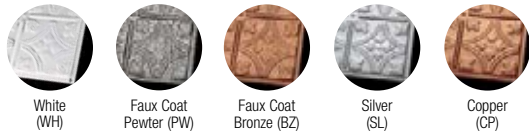

Color finishes available on Tincraft Circles panels only. Colored ceilings are dye-lotted and should be segregated by dye lot. Do not mix.

FACE VIEWS (1/4 of 24 x 24" panel shown)



Circles Squares Triangles

DETAILS (Other Suspension Systems compatible. Refer to listing on page 373.)



1. Tincraft™ Circles
2. Tincraft™ Squares
3. Tincraft™ Triangles
4. Tincraft™ Circles with Prelude® 15/16" suspension system
5. Tincraft™ Squares with Suprafine® 9/16" suspension system
6. Tincraft™ Triangles with Suprafine® 9/16" suspension system

TINCRAFT™

Circles, Squares & Triangles
Tegular
smooth texture

GREENGUARD
Gold Certified
(details below)

UP TO **56%** RECYCLED CONTENT

Calculate LEED contribution at armstrongceilings.com/greengenie

LEED®

- energy management
- construction waste mgmt
- regional materials
- design for flexibility
- EPD
- recyclable/extended producer resp.
- biobased materials
- recycled content
- sourcing of raw materials
- material ingredient reporting
- low emitting materials
- lighting quality
- acoustics

LOCATION DEPENDENT

VISUAL SELECTION

Edge Profile	Susp. Dwg. Pgs. 474-478 armstrongceilings.com/catdwgs	Item No. ♦	Dimensions (Inches)
TINCRAFT™ Circles			
15/16" Flush Tegular	3	8008 __	24 x 24 x 3/4" □
TINCRAFT Squares			
9/16" Flush Tegular	25	8009	24 x 24 x 3/4" □
TINCRAFT Triangles			
9/16" Flush Tegular	25	8010	24 x 24 x 3/4" □

PERFORMANCE SELECTION

Dots represent high level of performance.

\$\$\$

UL Classified Acoustics		Total Acoustics ¹	Fire Performance	Light Reflect (White only)	Mold & Mildew Protection	Sag Resist	Certified Low VOC Emissions	Durability	Recycled Content	Recycle Program	Warranty
NRC	+ CAC										
N/A	35 •	–	Class A	0.78	–	–	•	Std	Std	•	1-Yr
N/A	35 •	–	Class A	0.78	–	–	•	Std	•	•	1-Yr
N/A	35 •	–	Class A	0.78	–	–	•	Std	•	•	1-Yr

¹ Total Acoustics® ceiling panels have an ideal combination of noise reduction and sound-blocking performance in one product.
♦ Add 2-letter color suffix to item number when specifying or ordering (e.g., 8008 PW).



Circles




Squares



Triangles

Images represent a 12" x 12" section of panel.

SUSPENSION SYSTEMS



For coordinating color, specify Prelude® XL® items 7301 main beam, XL7342, XL7328 cross tees, and 7800 wall molding with the appropriate 2-letter color suffix.

PHYSICAL DATA

Material
Wet-formed mineral fiber

Surface Finish
Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less (UL labeled).

ASTM E1264 Classification
Type III, Form 2, Pattern J Z
(Classic embossed tin ceiling design)
Fire Class A

Humidity/Sag Resistance
Standard performance ceiling panels are recommended where the building is enclosed and the HVAC is continuously functioning.

VOC Emissions
GREENGUARD Gold Certified
Third-party certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010. This standard is the guideline for low emissions in LEED, CalGreen Title 24, ANSI/ASHRAE/USGBC/IES Standard 189; ANSI/GBI Green Building Assessment Protocol.

PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS UL.COM/GG UL 2818



Performance Guarantee & Warranty
1-year warranty on ceiling panel. Details at armstrongceilings.com

Weight; Square Feet/Carton
8008 – 0.90 lbs/SF; 48 SF/ctn
8009, 8010 – 1.23 lbs/SF; 32 SF/ctn

Minimum Order Quantity
1 carton

High Recycled Content
Classified as containing greater than 50% total recycled content. Total recycled content based on product composition of post-consumer and pre-consumer (post-industrial) recycled content per FTC guidelines.

Insulation Value
Average R Factor – 1.6 (BTU units)
Average R Factor – 0.28 (Watts units)

TechLine / 1 877 276-7876
armstrongceilings.com/commercial
(search: tincraft)
BPCS-3690-220

LEED® is a registered trademark of the U.S. Green Building Council
UL is a registered trademark of UL LLC. All other trademarks used herein are the property of AWI Licensing LLC and/or its affiliates
© 2020 AWI Licensing LLC Printed in the United States of America

Armstrong®
CEILING & WALL SOLUTIONS

373

MINERAL FIBER