

# USG DONN® BRAND CENTRICITEE™ DXT™/DXLT™ ACOUSTICAL SUSPENSION SYSTEM



USG Donn® Brand Centricitee™  
DXT™ Acoustical Suspension System/  
USG Eclipse™ Acoustical Panels

## FEATURES AND BENEFITS


- 9/16" exposed grid provides a clean aesthetic.
- Compatible with USG Logix™ Integrated Ceiling Systems.
- Cross-tee override-ends resist twisting and ensure a finished look.
- Proprietary Quick-Release™ cross tees.
- High recycled content (HRC) available.
- Seismic installation designs validated in ICC-ES Evaluation Report ESR-1222.
- Premium and custom colors available.
- Some items available in metric sizes.
- USG Donn® Brand Centricitee™ DXT™/DXLT™ Acoustical Suspension System is part of the Ecoblueprint™ portfolio - meeting today's sustainability standards. For sustainability documentation go to USG.com or CGCInc.com.

## APPLICATIONS


- Interior general-use areas
- Fire-rated interior general-use areas
- USG Logix™ Integrated Ceiling Systems

TO ORDER SAMPLES, GO TO [USG.COM](http://USG.COM) OR [CGCINC.COM](http://CGCINC.COM)

### STANDARD COLORS

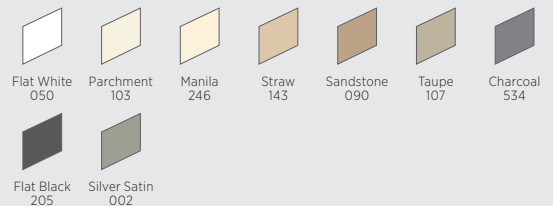


### ADVANTAGE COLORS

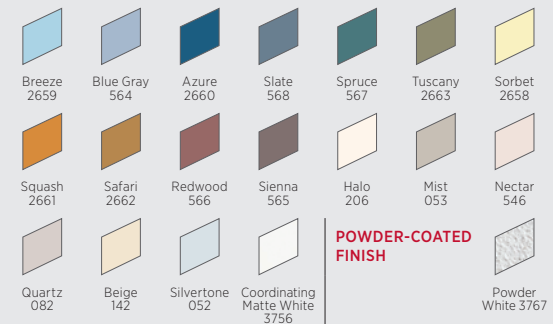


### PROFILE




### EDGE DETAIL



Square Edge



Fineline




Fineline Bevel

# USG DONN® BRAND CENTRICITEE™ DXT™/DXLT™ ACOUSTICAL SUSPENSION SYSTEM


ORDER SAMPLES/LITERATURE  
USG: [samplitt@usg.com](mailto:samplitt@usg.com)  
fax: 888 874-2348 | [usg.com](http://usg.com)  
CGC: contact Sales Representative

FOR MOST UP-TO-DATE  
TECHNICAL INFORMATION  
AND LEED REPORT TOOL  
[usgdesignstudio.com](http://usgdesignstudio.com)  
[cgcdesignstudio.com](http://cgcdesignstudio.com)


TECHNICAL SERVICES  
800 USG.4YOU (874-4968)



## 9/16" TEE SYSTEM<sup>6</sup> Main Tee



## Cross Tee 1-1/2"<sup>6</sup>



## MOLDING<sup>5</sup>



## PHYSICAL DATA/ FOOTNOTES

### Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.




AC3040/rev. 4-20  
© 2020 USG Corporation and/or its affiliates. All rights reserved. Printed in USA

ASTM Class	Length	Height	Item No. <sup>2</sup>	Fire Rating	Color <sup>3,4</sup>	Seismic Design Category		Rated Load <sup>1</sup>		
						IBC	ICC-ES Evaluated Installation	4' Hanger Spacing	5' Hanger Spacing	
Intermediate Duty	10' 3000 mm	1-1/2" 38 mm	DXT24-10	Class A	Flat White	A, C	7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF	
	12' 3600 mm	1-1/2" 38 mm	DXT24	Class A	Flat White Standard Advantage	A, C	7/8" Molding ACM7 Clip	12 lb./LF	6.6 lb./LF	
			DXT24HRC							
Heavy Duty	12' 3600 mm	1-5/8" 42 mm	DXT26	Class A	Flat White	A, F	7/8" Molding ACM7 Clip	16 lb./LF	7.3 lb./LF	
			DXT26HRC							
Intermediate Duty	1'	1-1/2"	DXT122	Class A	Flat White					
	2' 600 mm	1-1/2" 38 mm	DXT222	Class A	Flat White Standard Advantage					
			DXT222HRC							
			DXLT222							
	30"	1-1/2"	DXT3022	Class A	Flat White					
	5'	1-1/2"	DXT524	Class A	Flat White					
	6'	1-1/2"	DXT624	Class A	Flat White					
	8'	1-1/2"	DXT824	Class A	Flat White					
	4' 1200 mm	1-1/2" 38 mm	DXT422	Class A	Flat White					
			DXT424	Class A	Flat White Standard Advantage					
DXT424HRC										
DXLT424										
Heavy Duty		1-5/8"	DXT426	Class A	Flat White					

### HRC High Recycled Content

Classified as containing greater than 50% total recycled content. Total recycled content is based on product composition of postconsumer and preconsumer (postindustrial) recycled content per FTC guidelines.



Wall Angle	Length	Item No.	Color
	12' 3600 mm	M9 M9HRC	Flat White, Standard, Advantage
	12'	MS174	Flat White, Standard, Advantage
Shadowline 	10'	MS274 2" shelf for seismic	Flat White

### Product literature and samples

Data sheet: AC3040, USG Logix™ system guide: IS268  
USG Logix™ architectural design guide: IS287, USG Logix™ critical system dimensions: IS609, Sample: 206564

### Material

Min. G30 hot-dipped galvanized steel body and cap. Baked on polyester paint or powder-coated finish.

### Installation

Install according to ASTM C636, ASTM E580, CISCA and USG requirements. Alternate installation methods may be used when approved by the authority having jurisdiction.

### Online tools

[usgdesignstudio.com](http://usgdesignstudio.com) or [cgcdesignstudio.com](http://cgcdesignstudio.com)

### Air diffusers

Refer to: AC272

### Limitations

Refer to specific ceiling panel for limitations with square edge panels.

### ICC Evaluation Service, LLC Report Compliance

For areas under ICC jurisdiction, see ICC-ES Evaluation Report ESR-1222 for allowable values and conditions of use. Reports are subject to reexamination, revision and possible cancellation. Refer to [usg.com](http://usg.com) for most current version.

### LA Research Report - RR 25764

USG Donn® Brand suspension systems manufactured by USG Interiors, LLC have been reviewed and are approved by listing in the following L.A. Research Report number: 25764. Refer to [usg.com](http://usg.com) for most current version.

### ASTM Load Compliance

Classified as Light, Intermediate or Heavy Duty when tested in accordance with ASTM C635.

### Notes

- Load test data shows uniform load in lb./LF based on simple span tests in accordance with ASTM C635 deflection limit on L/360.
- Metric available—contact customer service.
- Color options are for Class A imperial products.
- Custom color available. Upcharges apply to Standard, Advantage and custom colors.
- Panels must be specified to be field-cut to size and field-revealed to provide as wide a lay-on edge as possible.
- Metric sizes shown available with standard lead times. Other metric sizes available by RTQ.

Manufactured by USG Interiors, LLC  
550 West Adams Street  
Chicago, IL 60661

The trademarks USG, CGC, CENTRICITEE, DONN, DXLT, DXT, ECLIPSE, FIRECODE, LOGIX, QUICK-RELEASE, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

