# TRIM-TEX
## DRYWALL PRODUCTS

# SUBMITTAL SHEET

**1 ⅛"**  **A**

**B**
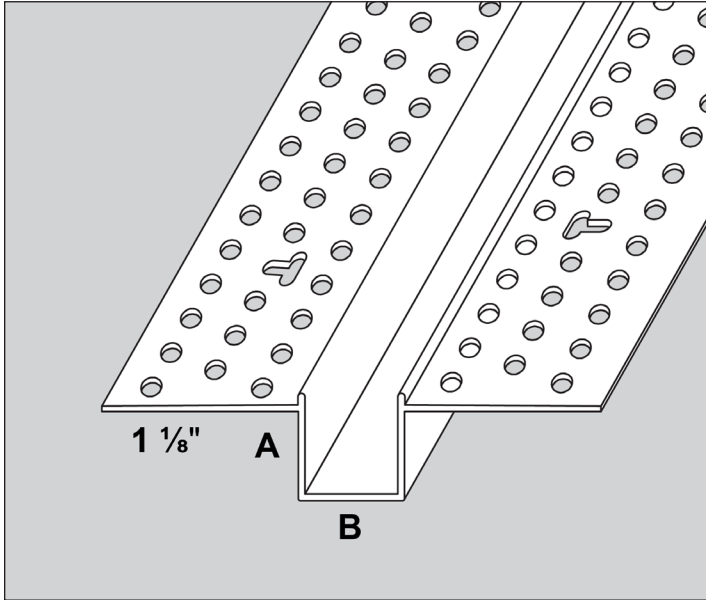
## Architectural Reveal Bead

*Sizes listed as A x B*

| STOCK # | NAME | PCS/BOX |
|---|---|---|
| AS5110 | AS ½" x ½" Reveal 10' | 20 |
| AS5150 | AS ¼" x ¼" Reveal 10' | 25 |
| AS5160 | AS ½" x ¼" Reveal 10' | 20 |
| AS5170 | AS ¼" x ¾" Reveal 10' | 15 |
| AS5210 | AS ½" x ¾" Reveal 10' | 15 |
| AS5310 | AS ½" x 1" Reveal 10' | 15 |
| AS5315 | AS ½" x 2" Reveal 10' | 10 |
| AS5320 | AS ⅝" x ½" Reveal 10' | 15 |
| AS5325 | AS ⅝" x ⅝" Reveal 10' | 15 |
| AS5330 | AS ⅝" x ¾" Reveal 10' | 15 |
| AS5340 | AS ⅝" x 1" Reveal 10' | 12 |
| AS5345 | AS ⅝" x 1½" Reveal 10' | 10 |
| AS5350 | AS ⅝" x 2" Reveal 10' | 10 |

**Description:** Trim-Tex Architectural Reveal Bead is designed to create details in walls that allow for up to ⅛" expansion control.

**Advantages:** Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold

**Limitations:** Product is designed for interior & exterior use.

**Applicable Standards:** Rigid PVC products made by Trim-Tex achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84.

**Surface Characteristics:** Trim-Tex products are made from PVC. PVC does not support combustion and is self extinguishing when the source of flame or heat is removed.

**Installation:** Trim-Tex recommends following established acceptable industry standard installation methods. Detailed installation instructions can be found at www.trim-tex.com.

**Finishing:** Always use a high quality paint.

**Accessories:** 847 Spray Adhesive and Safety Products distributed by Trim-Tex.

Job Name _____

Contractor _____

Date _____

**Approvals (Signatures or Stamps)**